

Pacer 30



The Pacer 30 is the smart choice for fast, effective vacuuming of large carpeted areas. Its dual 1-HP vacuum motors provide impressive cleaning muscle in a single 30-inch (76.2 cm) pass.

- A unique vacuum muffling system, combined with extraordinary filtration make the Pacer 30 an exceptionally quiet wide-area vacuum.
- The large rear wheels and front swivel casters mean easy maneuverability.
- The Pacer 30's compact profile, adjustable handle, and self-propelling brush action make it easier and less tiring to use, compared to competitive vacuums.
- At a steady work pace, the Pacer 30 will cover 19,000 square feet (1,767 m²) of carpet per hour.
- The Pacer 30 is ideal for reception halls, meeting rooms, hotel hallways, airport terminals, or any other large areas that demand high-performance cleaning in a hurry.
- For above-the-floor cleaning tasks, the Pacer 30 can be ordered with a built-in tool kit. The tool kit features an on-board hose that stretches to 9.5 feet (2.9 m), a 2-piece wand, a crevice tool and a round brush.


NSS® Enterprises, Inc. 3115 Frenchmens Road Toledo, Ohio 43607-2958 USA



Pacer 30 Specifications

Cleaning Path Vacuum Motors	30 in. (76.2 cm)	Filtration	4-stage clean air system, 3 internal and 1 exhaust	Cord	75 ft. (22.9 m) 14- 3 SJT
-Quantity -Type -Voltage	2 Single-stage 115V. (230V. available)	-Capacity -Filter Area -Location	filter (HEPA optional) 1.5 bu. (42.5 l.) 795 in.² (5128 cm²) Enclosed Cloth w/ zipper closure, w/ disposable paper filter	Overload Protection	17.5 amp reset circuit breaker
-HP -CFM -Closed Waterlift	1 HP (2 HP total) 194 ft. ³ (5.5 m ³) 44 in. (112 cm)			Sound Level	69 dbA @ operator
Brush Motor -Voltage -HP	115V. (230V. available) 1/3 HP	Switches & Controls	Dual deadman levers	Dimensions -Length -Width	43.5 in. (110.5 cm) 31.75 in. (80.6 cm)
Brush -Construction -Bristles -Drive -Adjustment	Plastic cylinder core Nylon (adjustable wear) Poly v-belt, steel pulleys 5 pile-height positions	Construction -Body -Handle -Shoe -Wheels -Casters	Polyethylene Plated steel tubing w/ plastic grips Stainless steel (2) 10 in. (25.4 cm) rubber (2) 2 in. (5 cm) swivel type	-Height -Weight • Machine • Shipping	36 in. (91.4 cm) 100 lbs. (45.4 kg) 120 lbs. (54.5 kg)
-Speed -Width	1725 RPM 30 in. (76.2 cm)			Warranty	3 years limited 10 years poly parts

Productivity — Floor coverage for the Pacer 30 is 19,000 sq. ft. per hour (1,767 m²).

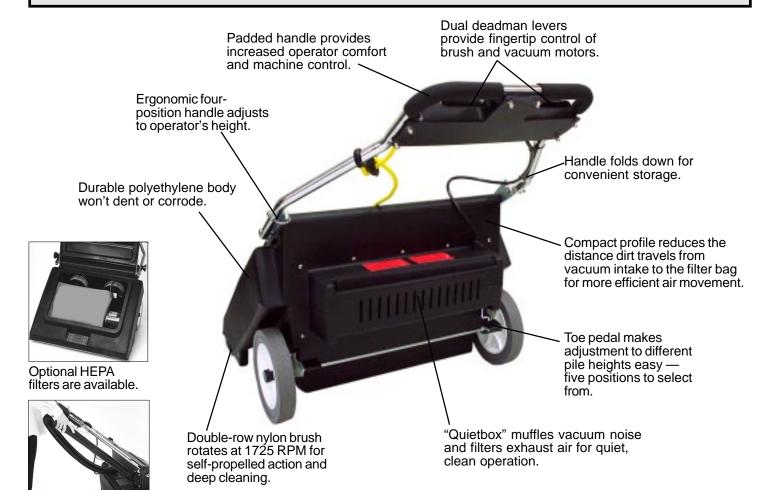

Available with a built-in hose and onboard tools for convenient abovethe-floor cleaning.



NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958 USA
800/677-1663 or 419/531-2121
Fax 419/531-3761
www.nss.com
mailus @nss.com
Specifications and appearance
subject to change without notice.

DISTRIBUTED BY

Printed in USA ©2004 NSS Enterprises, Inc. #9093101 REV C 6/04